

SRCC智慧型棒材切斷 & 倒角機

Smart Rod Cutting & Chamfering Machine

一台全自動精密型複合切斷與倒角製成的工具機

J.L.
CHIA LERN

TAIWAN



SRCC智慧型棒材切斷 & 倒角機 CH-CM0406

- 結合切斷與倒角製程
- 出料二次夾持
- 全自動化進出料
- 雙主軸伺服旋轉
- 雙邊倒角
- 六軸伺服控制

基本規格

機器尺寸	2450 x 1470 x 1950 (LxWxH/mm)
機器重量	2050 (kg)
電力需求	3Ø AC220V (380V), 60Hz, 4.4KW
切斷砂輪	310D - 1.5T - 31.75 IH
倒角砂輪	250D - 10T - 31.75 IH

適用規格

棒材外徑	Ø 3 ~ 25 (mm)
棒材長度	100 ~ 600 (mm)
倒角角度	60 ~ 135 (依據倒角砂輪角度調整) (°)

◎ 多重砂輪組合



◎ 出料夾爪



◎ 雙主軸



◎ 集料抽屜



◎ 最長600mm可用大料槽



Smart Rod Cutting & Chamfering Machine

An automatic machine tool that combine the process of cutting & chamfering function



Smart Rod Cutting & Chamfering Machine CH-CM0406

- Combine the process of cutting and chamfering
- Twice clamps to unload material firmly attached
- Full automatically loading and unloading
- Double servo spindle workheads
- Double end chamfering
- Six axes servo control

Basic Specification

Machine size	2450 x 1470 x 1950 (LxWxH/mm)
Machine weight	2050 (kg)
Power request	3Ø AC220V (380V), 60Hz, 4.4KW
Cut of wheel	310D - 1.5T - 31.75 IH
Chamfering wheel	250D - 10T - 31.75 IH

Function Specification


Range of out Diameter	Ø 3 ~ 25 (mm)
Range of Length	100 ~ 600 (mm)
Chamfering angle	60 ~ 135 (depends on the wheel angle) (°)



© Multiple wheel combination



© Unloading gripper

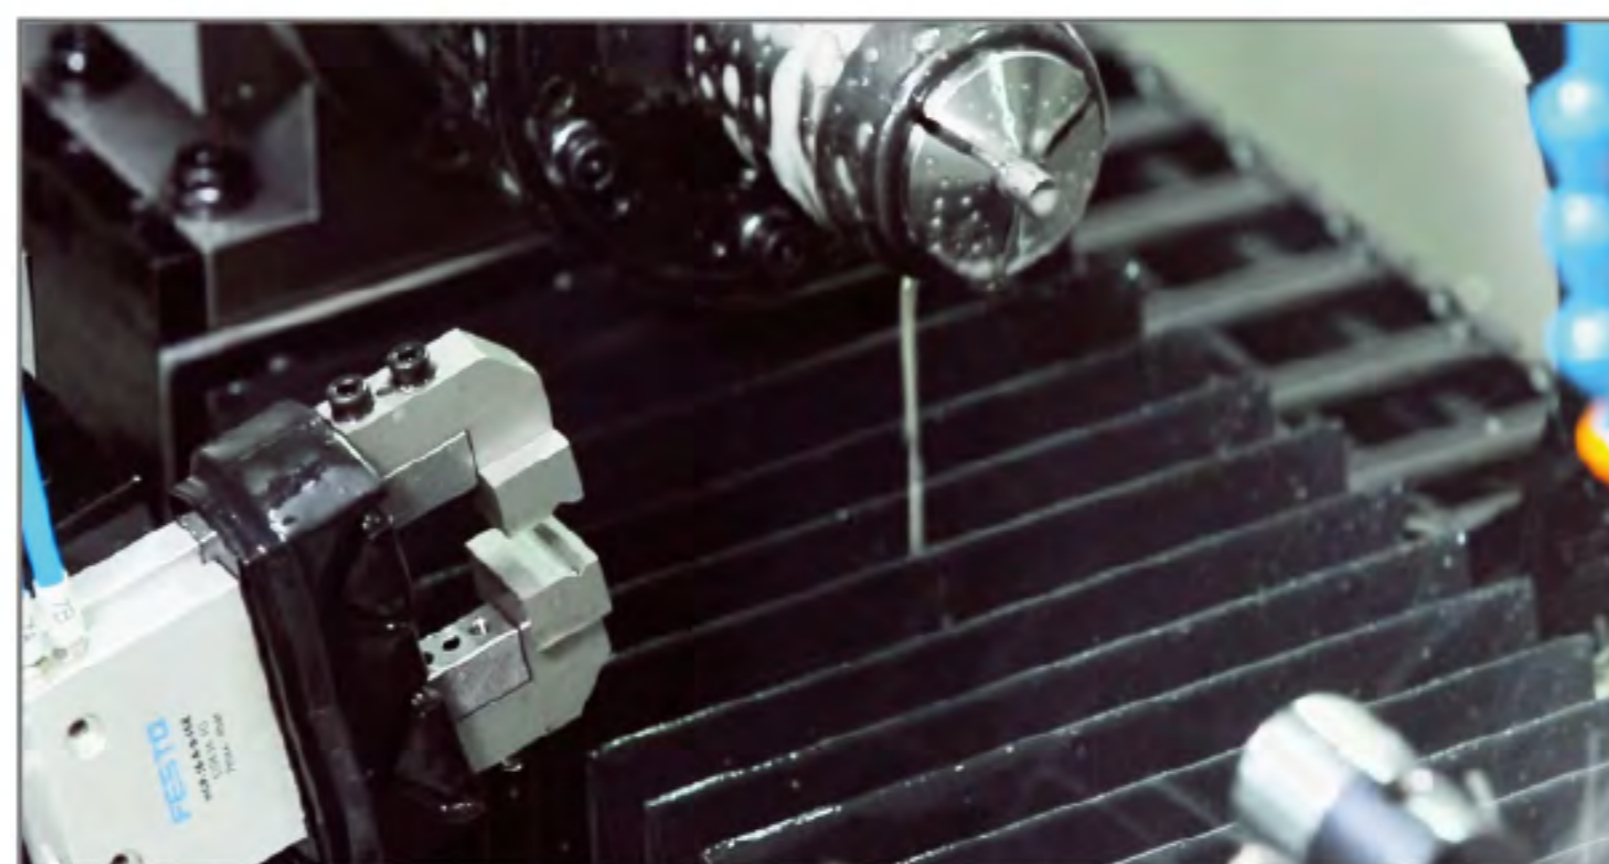

© Double WP Spindles



© Bar collect drawer



© Max 600 mm Loading box

